



N2026
LD

1920 X 1200 Pixels
14-inch IPS Live Performance Display




120mm



120mm

MB

120mm

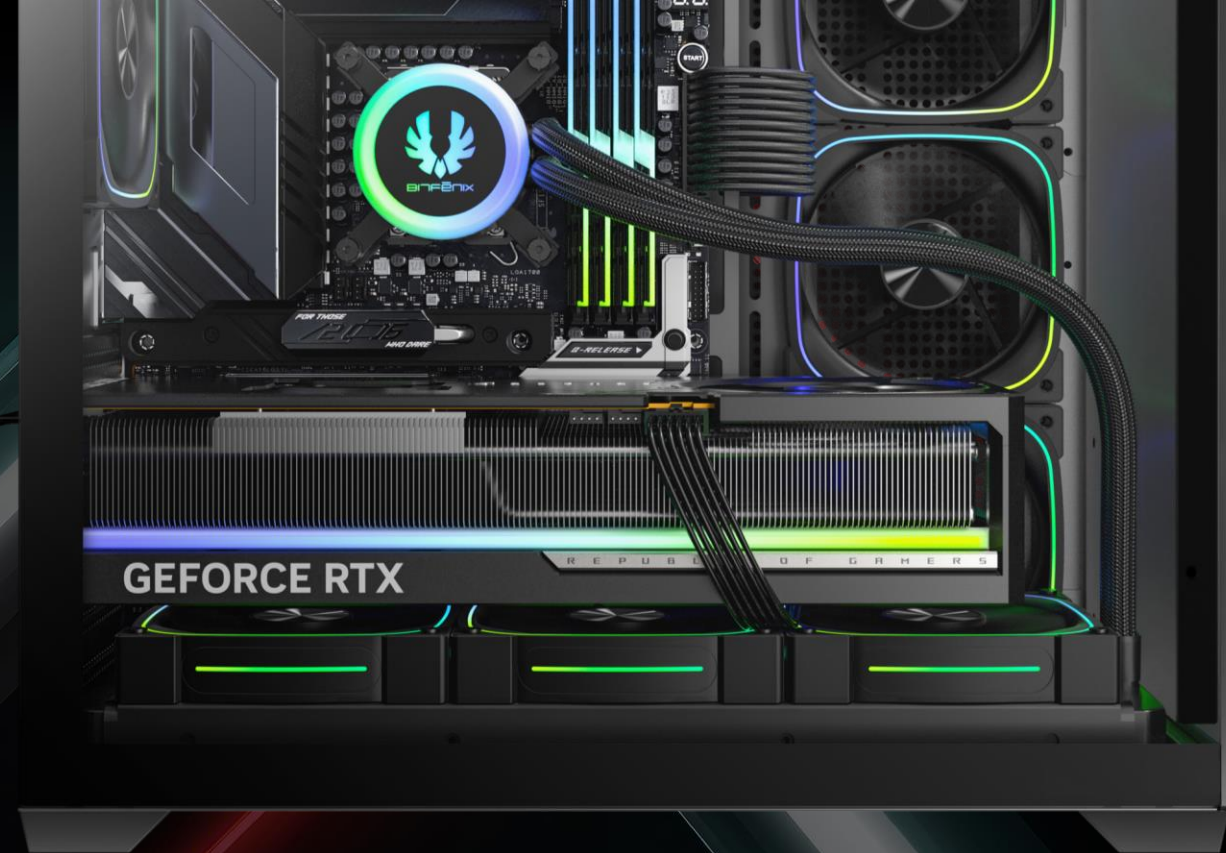

360mm AIO Support
At Bottom

Supports **BTF** Back-Connect Motherboard

285mm

420mm

400mm

Maximum CPU
Cooler Height

165 mm

Cable Management Space 90.9 mm

Motherboard
Support

ITX
M-ATX
ATX

Maximum Graphics Card
Support **400 mm**

Back-Connect Motherboard






3X

High-Performance
Reverse ARGB Fan




1X

High-Performance ARGB Fan

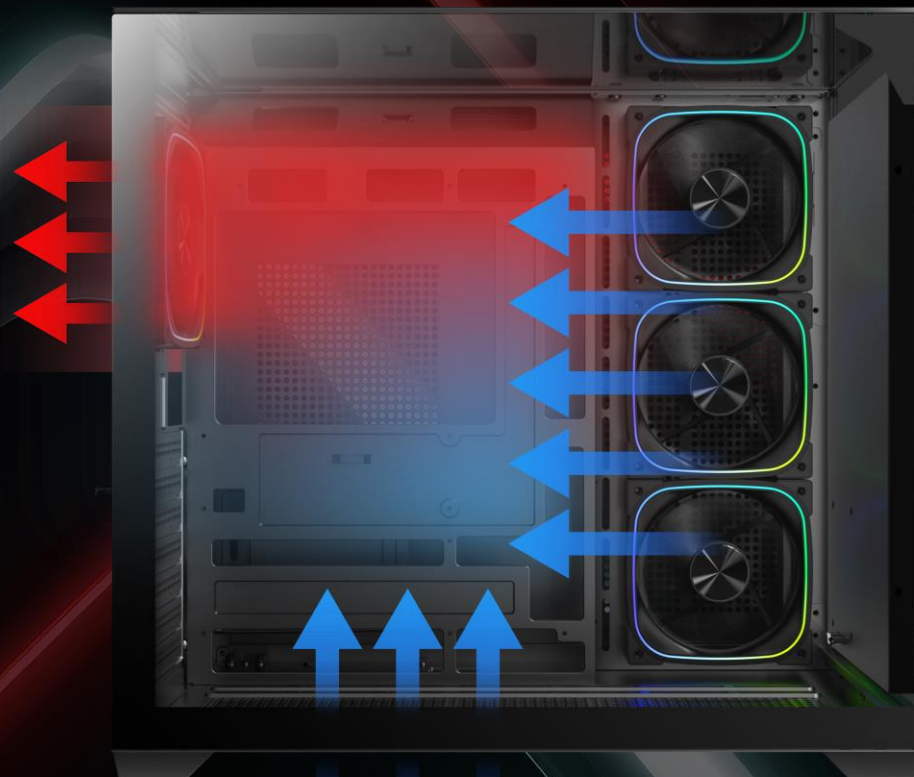

DUAL CHAMBER
HIGH
AIRFLOW PERFORMANCE

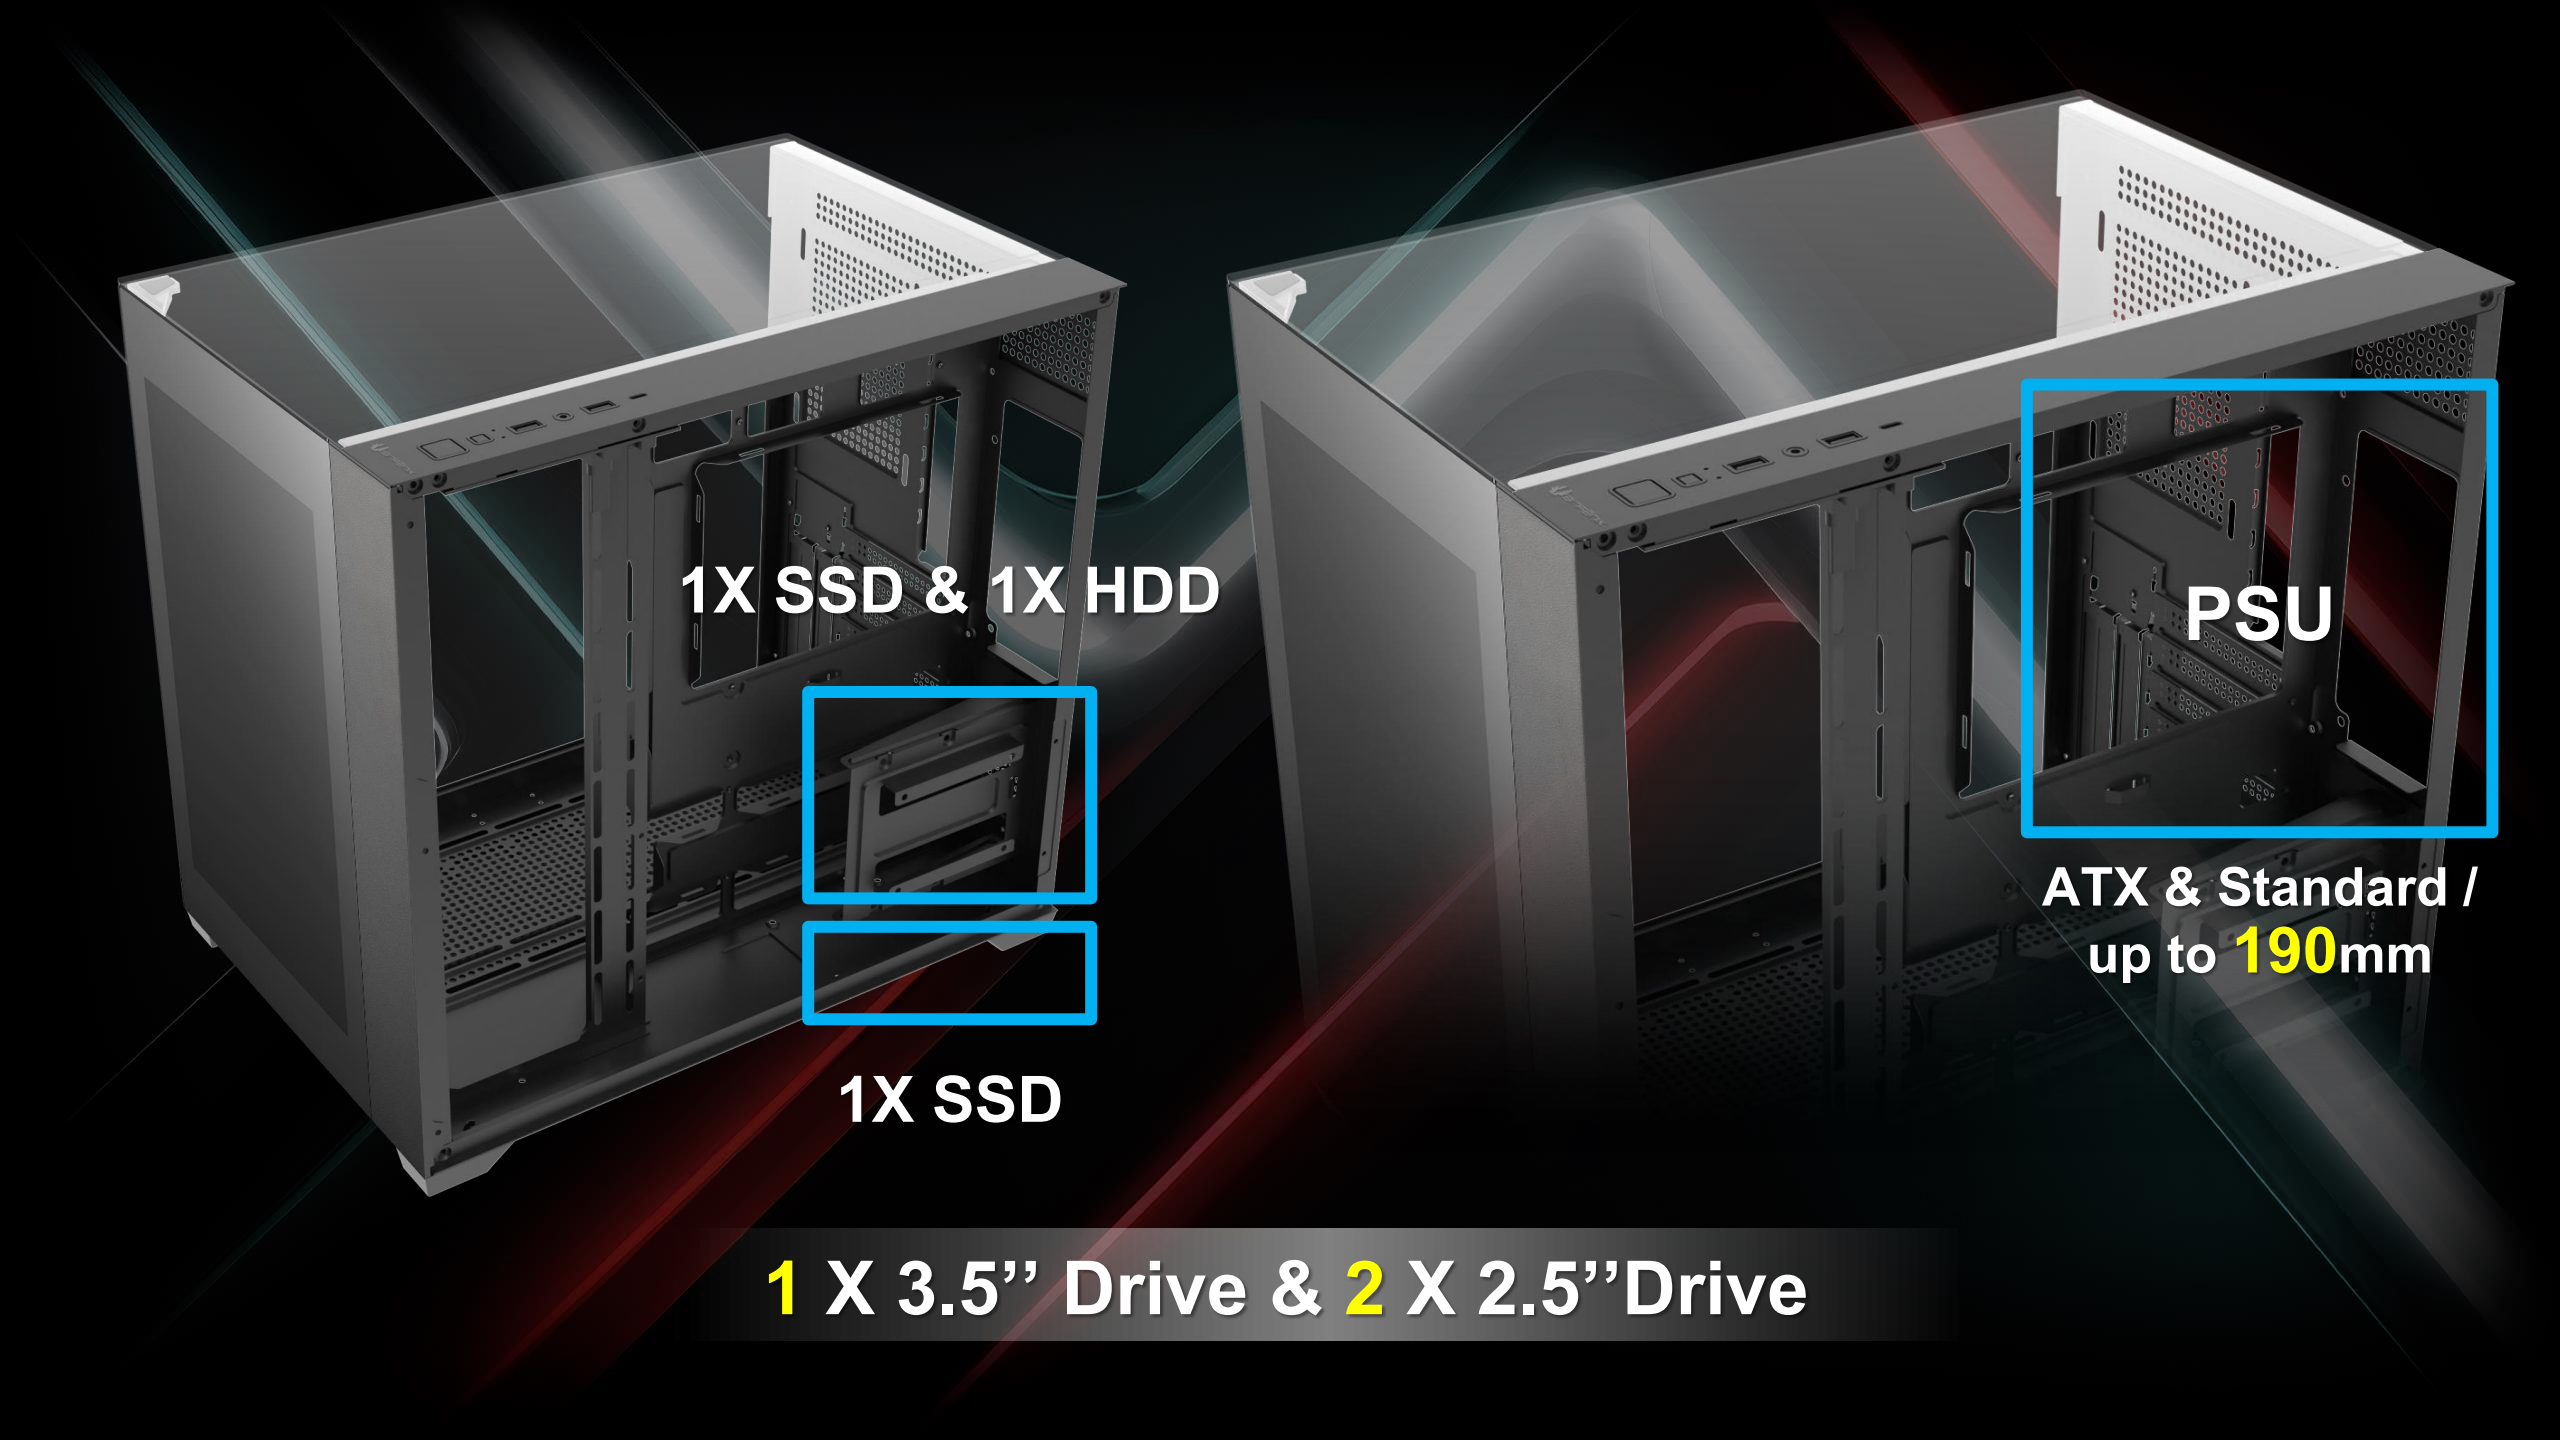

1X SSD & 1X HDD


1X SSD

PSU

ATX & Standard /
up to **190**mm

1 X 3.5" Drive & **2** X 2.5" Drive

Easy Clean With **Removable** Dust Filter

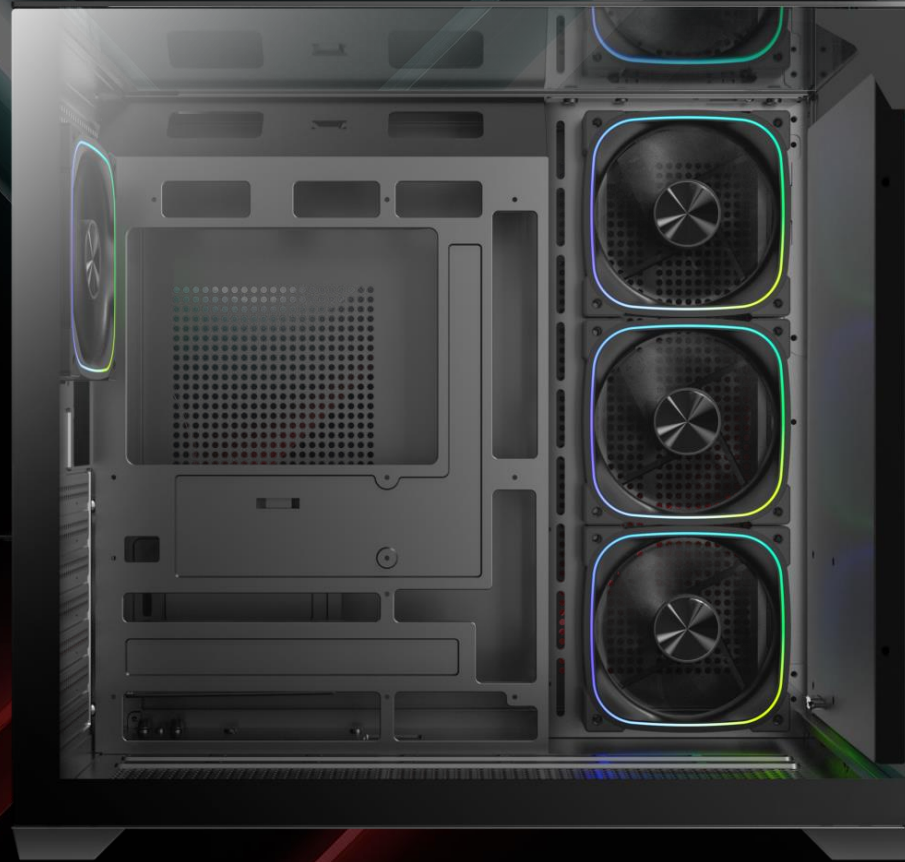

Dust Filter (Bottom)

1X TypeC

Reset
Button

Power Button

2X USB

1X USB 3.0

Tool-free Removal



N2026 LD

N2026 LD Black		
Part no.	BFC-NLD850KKGKK-4A	
EAN	4712883213403	
UPC	886027010372	
Net weight (NW) Gross weight (GW)	N.W: Kgs / G.W: Kgs	
Materials	Steel, Mesh, Plastic, Tempered Glass	
Chassis Dimensions (W x H x D)	420 mm x 285 mm x 400 mm	
Motherboard Supports	Mini-ITX, MicroATX, ATX	
Air Cooler Height Support	165mm	
VGA Length Support	400mm	
Cable Management Support	up to 90.9mm	
2.5" / 3.5" Drive Bay	2 / 1	
Fan mounts	Rear	1 x 120mm
	M/B	3 x 120mm
	Bottom	3 x 120mm
Radiator Support	Rear	1 x 120mm
	M/B	1 x 240mm
	Bottom	1 x 360mm/ 1 x 280mm/ 1 x 240mm (Thickness up to 27mm)
PCI-E Slots	7 Slots	
I/O Ports	1 x TypeC/ 1 x USB 3.0/ 1 x USB/ Audio I/O	
Power Supply	ATX & Standard / up to 190mm	



14-inch Monitor

Display screen visible size

301mm x 188mm

Product (frame) size

311mm x 201mm x 11mm

Display resolution

1920 x 1200 Pixels

Interfaces

HDMI, USB-TYPE-C adapter cable,
cable length 1000mm