T10
DIGITAL ES

# 600 X 1600 PIXELS
# 8.8-INCH IPS LIVE PERFORMACE DISPLAY

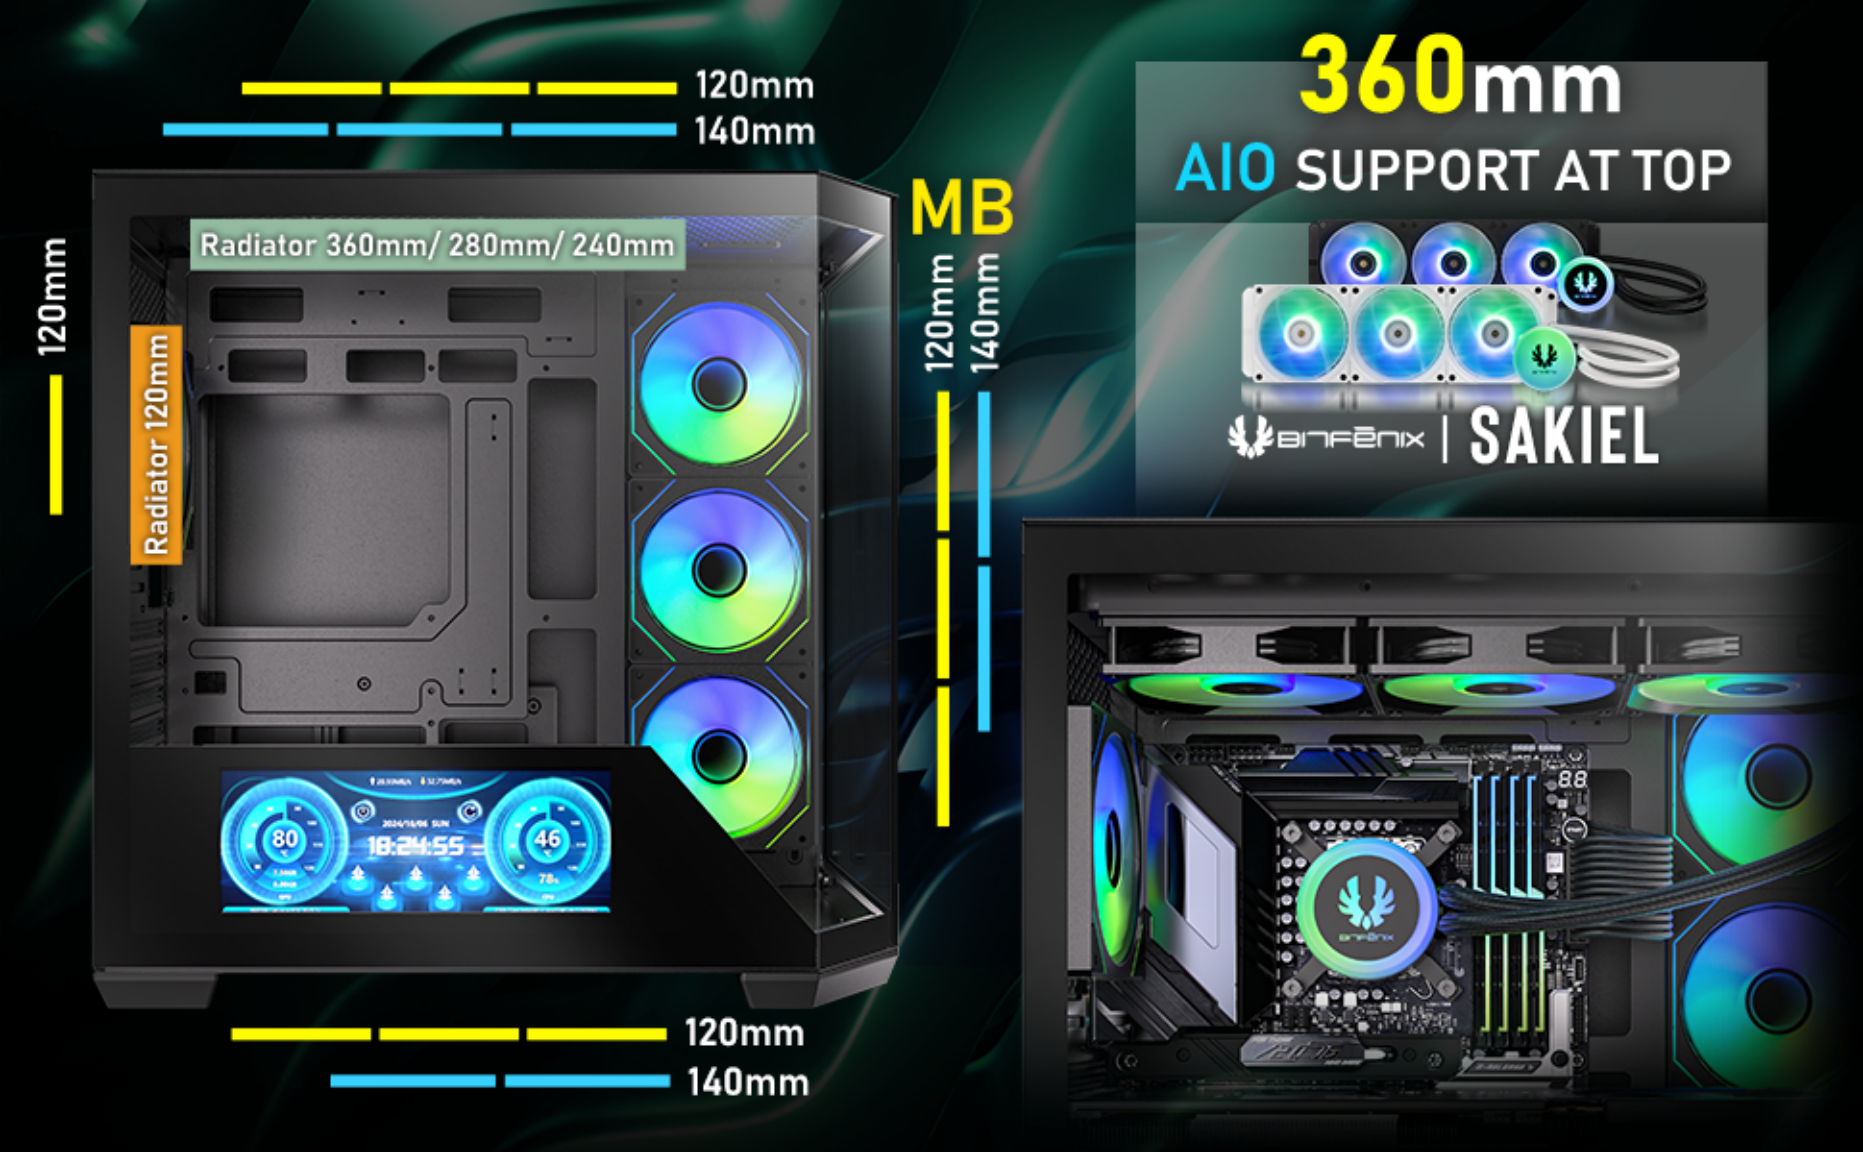
120mm
140mm
120mm
Radiator 360mm/ 280mm/ 240mm
Radiator 120mm
MB
120mm
140mm
120mm
140mm
360mm
AIO SUPPORT AT TOP
BINFENIX | SAKIEL

## MOTHERBOARD

ATX Micro-ATX Mini-ITX

## VGA LENGTH SUPPORT

**420mm**
(16.5inch)

## CABLE MANAGEMENT

UP TO
**90mm**(3.5inch)

277mm(10.9 Inch)

443mm(17.4 Inch)

426mm(16.7 Inch)

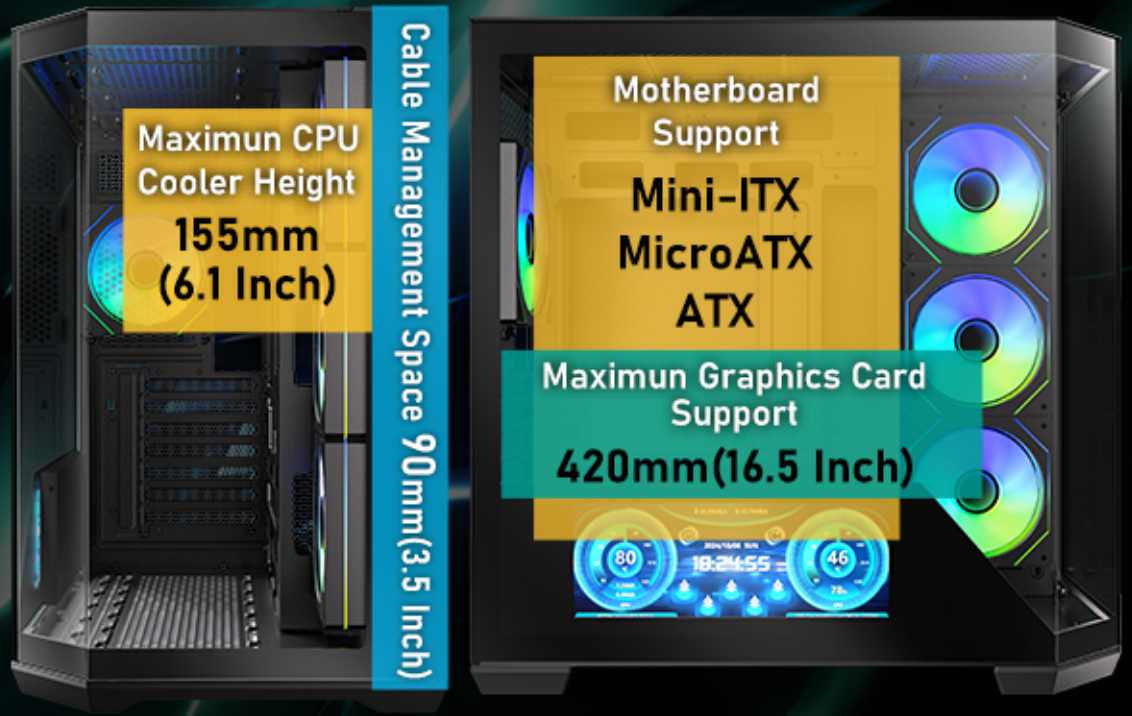

# TRENDY DESIGN WITH REVERSE CONNECT ATX MOTHERBOARD COMPATIBILITY

## ATX

TUF GAMING
Z790-BTF WIFI

# 3X

## REVERSE INFINITY MIRRORS ARGB FANS

## DUAL CHAMBER HIGH AIRFLOW PERFORMANCE

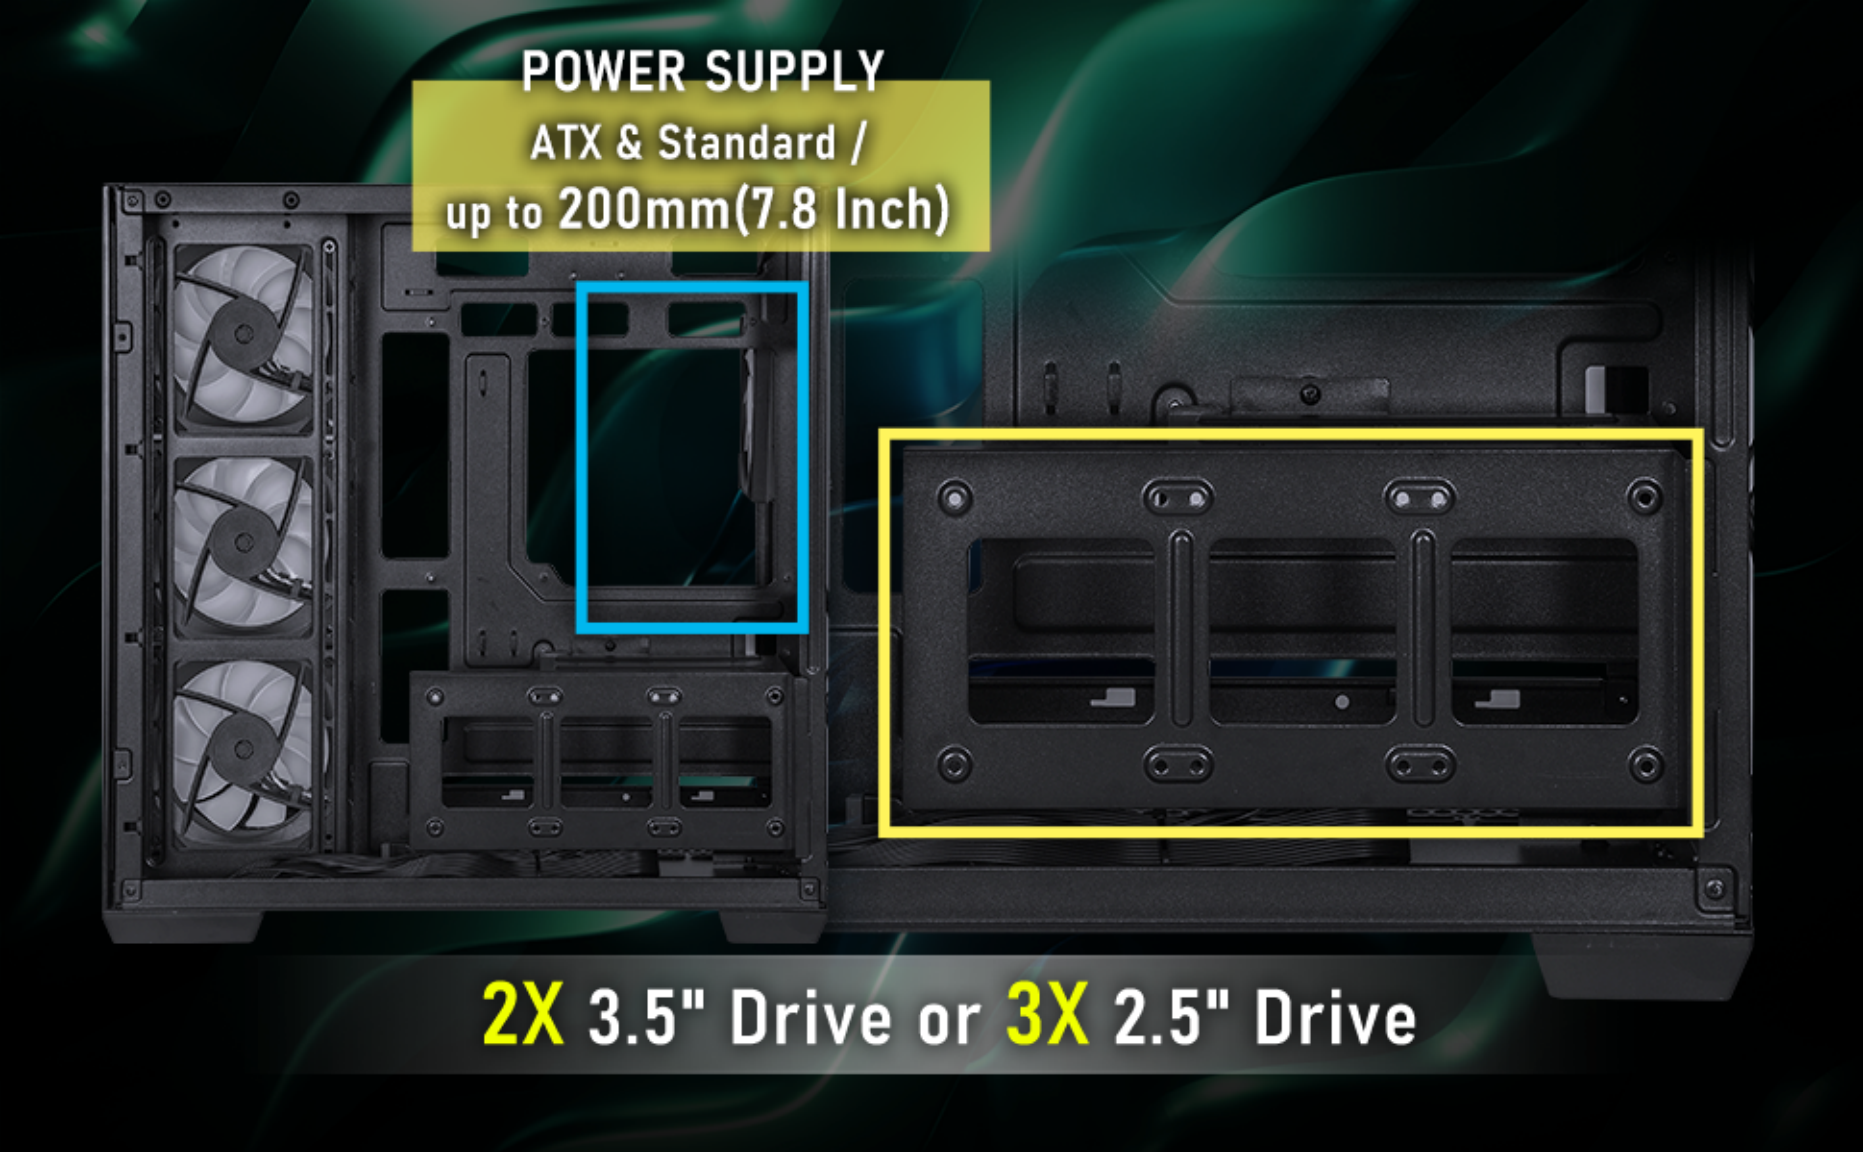
POWER SUPPLY
ATX & Standard /
up to 200mm(7.8 Inch)
2X 3.5" Drive or 3X 2.5" Drive

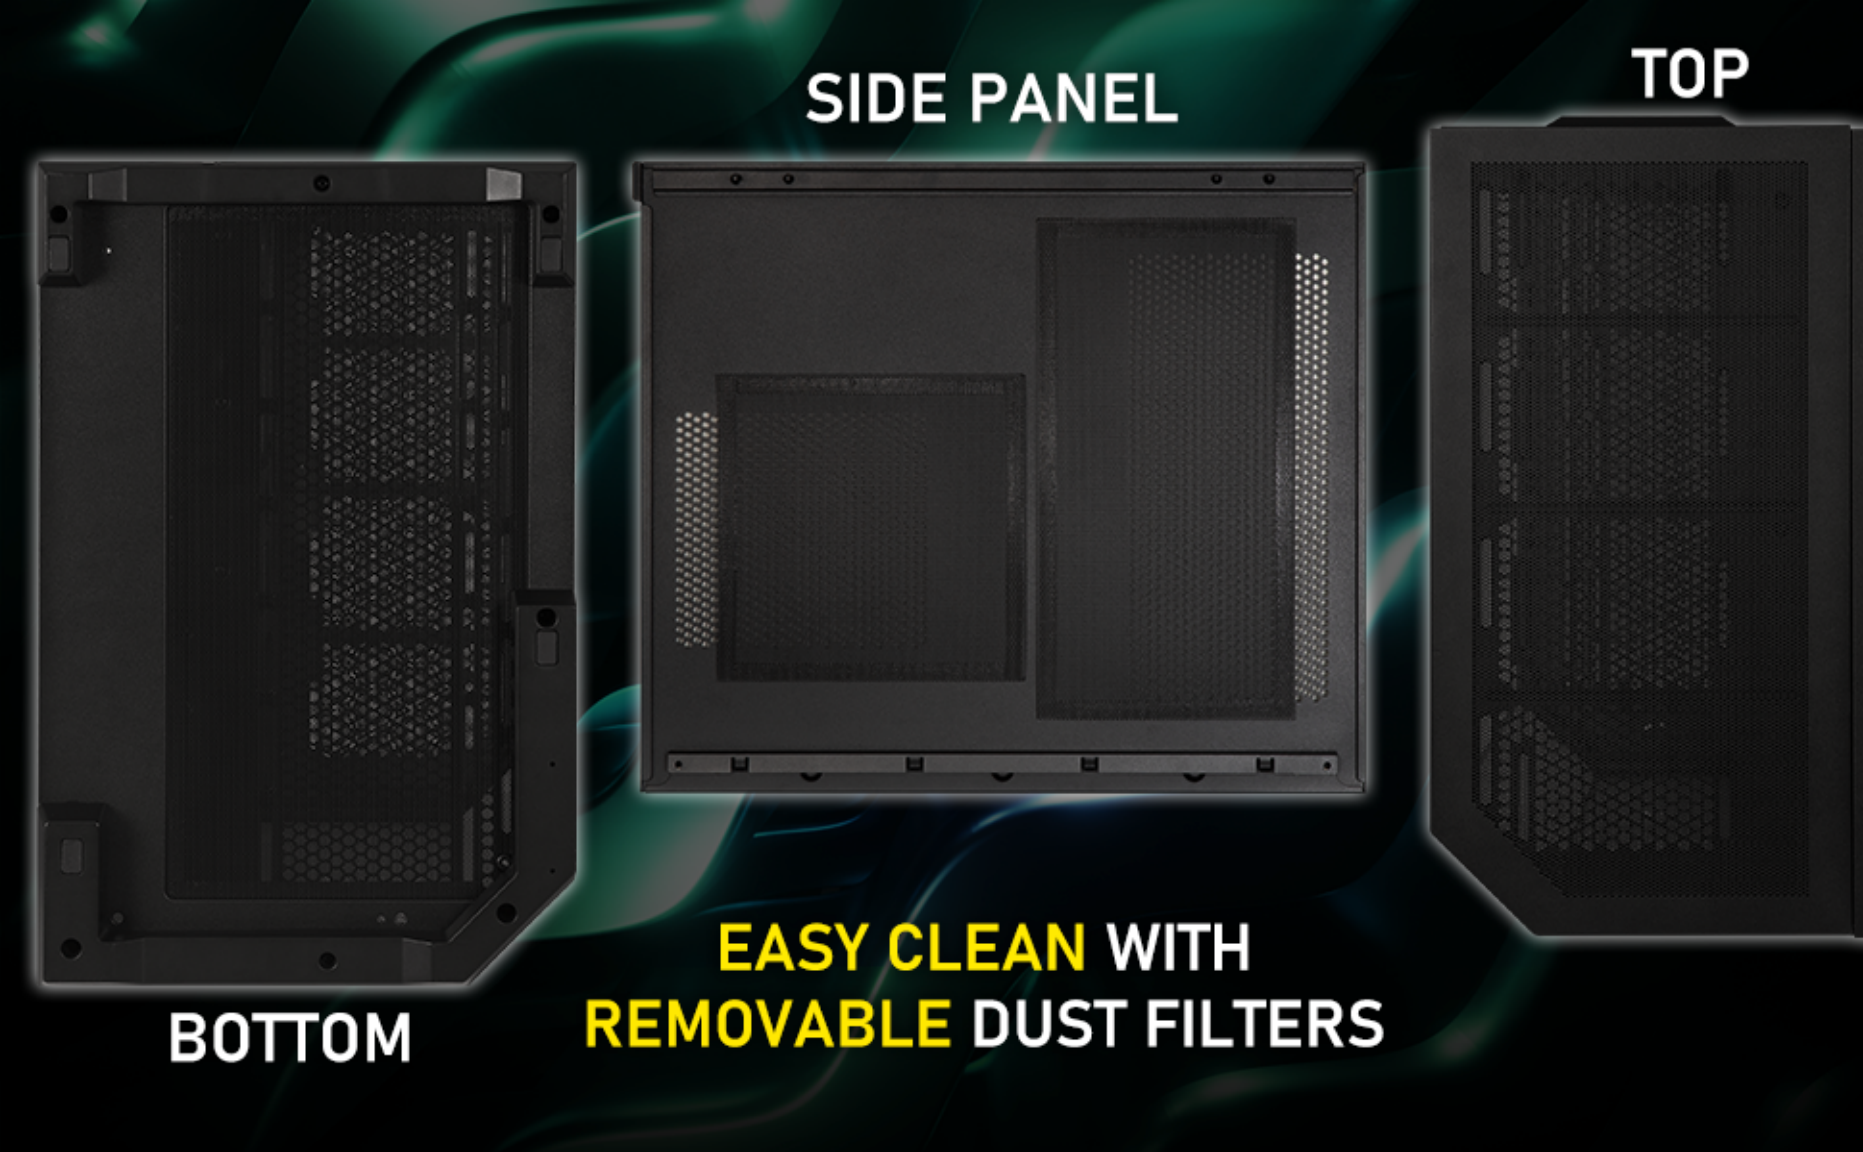
SIDE PANEL
TOP
BOTTOM
EASY CLEAN WITH
REMOVABLE DUST FILTERS

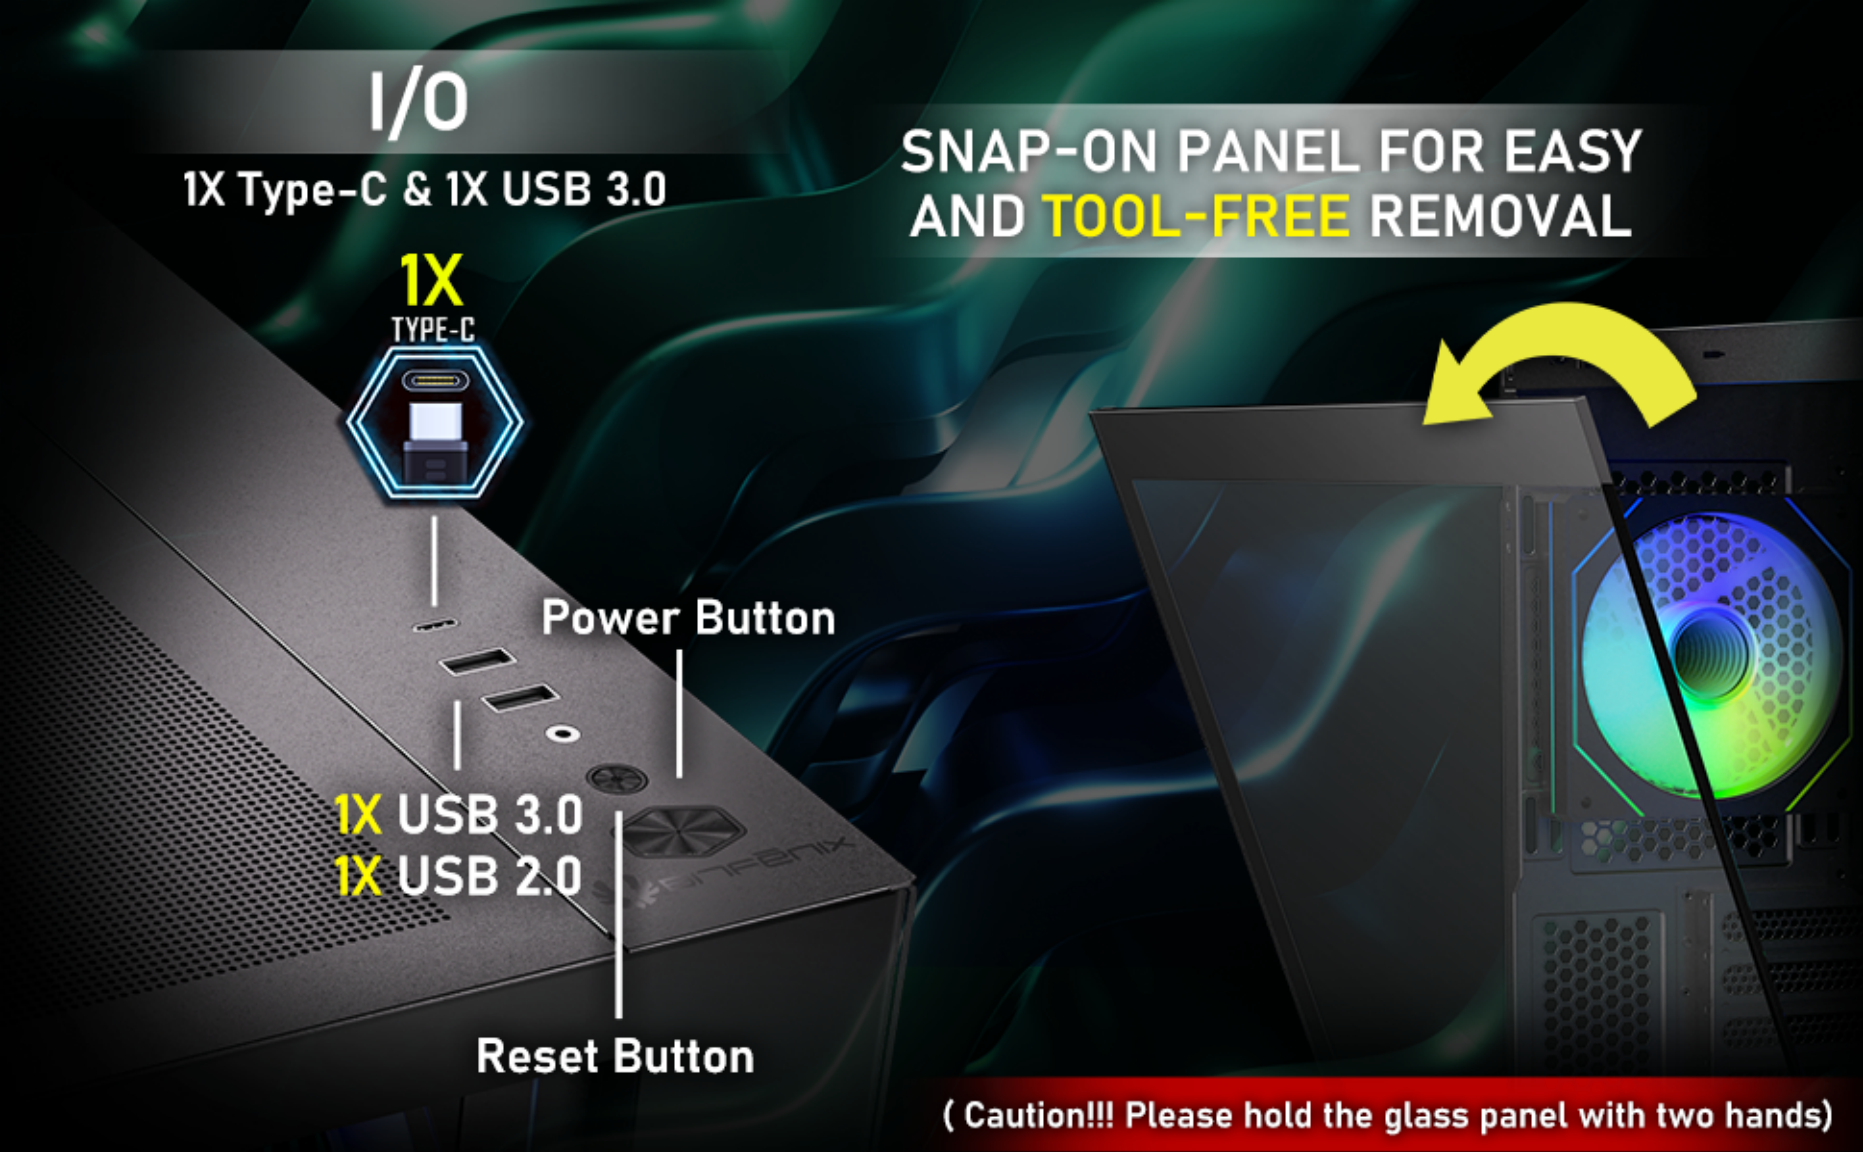
I/O
1X Type-C & 1X USB 3.0
1X
TYPE-C
Power Button
1X USB 3.0
1X USB 2.0
Reset Button
SNAP-ON PANEL FOR EASY
AND TOOL-FREE REMOVAL
( Caution!!! Please hold the glass panel with two hands)

| | | |
|---|---|---|
| Part no. | | |
| EAN / UPC | | |
| (NW)/ (GW) | | N.W:6.9Kgs / G.W:7.9Kgs |
| Materials | | Steel, Mesh, Plastic, Tempered Glass |
| Dimensions (W x H x D) | | 277 mm x 426 mm x 443 mm |
| Carton Size (W x H x D) | | 344 mm x 515 mm x 492 mm |
| Motherboard Supports | | Mini-ITX, MicroATX, ATX |
| Air Cooler Height Support | | 155mm |
| VGA Length Support | | 420mm |
| Cable Management Support | | up to 90mm |
| 3.5" Drive Bay/ 2.5" Drive Bay | | 2 / 3 |
| Fan mounts | MB | 120mm x 3 / 140mm x 2 |
| | Top | 120mm x 3 / 140mm x 2 |
| | Rear | 120mm x 1 |
| | Bottom | 120mm x 3 / 140mm x 3 |
| Radiator Support | MB | 360mm x 1 / 280mm / 240mm x 1 (Thickness up to 27mm) |
| | Top | 360mm x 1 / 280mm / 240mm x 1 (Thickness up to 27mm) |
| | Bottom / Rear | 280mm / 240mm x 1 (Thickness up to 27mm) / 120mm x 1 |
| PCI-E Slots | | 7 Slots |
| I/O Ports | | USB 3.1/TypeC x 1, USB 3.0 x 1, USB 2.0 x 1, Audio I/O |
| Power Supply | | ATX & Standard / up to 200mm |

**8.88 INCH IPS DISPLAY**

| |
|---|
| Display screen visible size |
| 204mm x 76mm |
| Product (frame) size |
| 224mm x 96mm x 15mm |
| Display resolution |
| 600 x 1600 Pixels |

Display interface TYPE-C, USB-TYPE-C adapter cable, cable length 1000mm.
Adhesive backing on the front.